


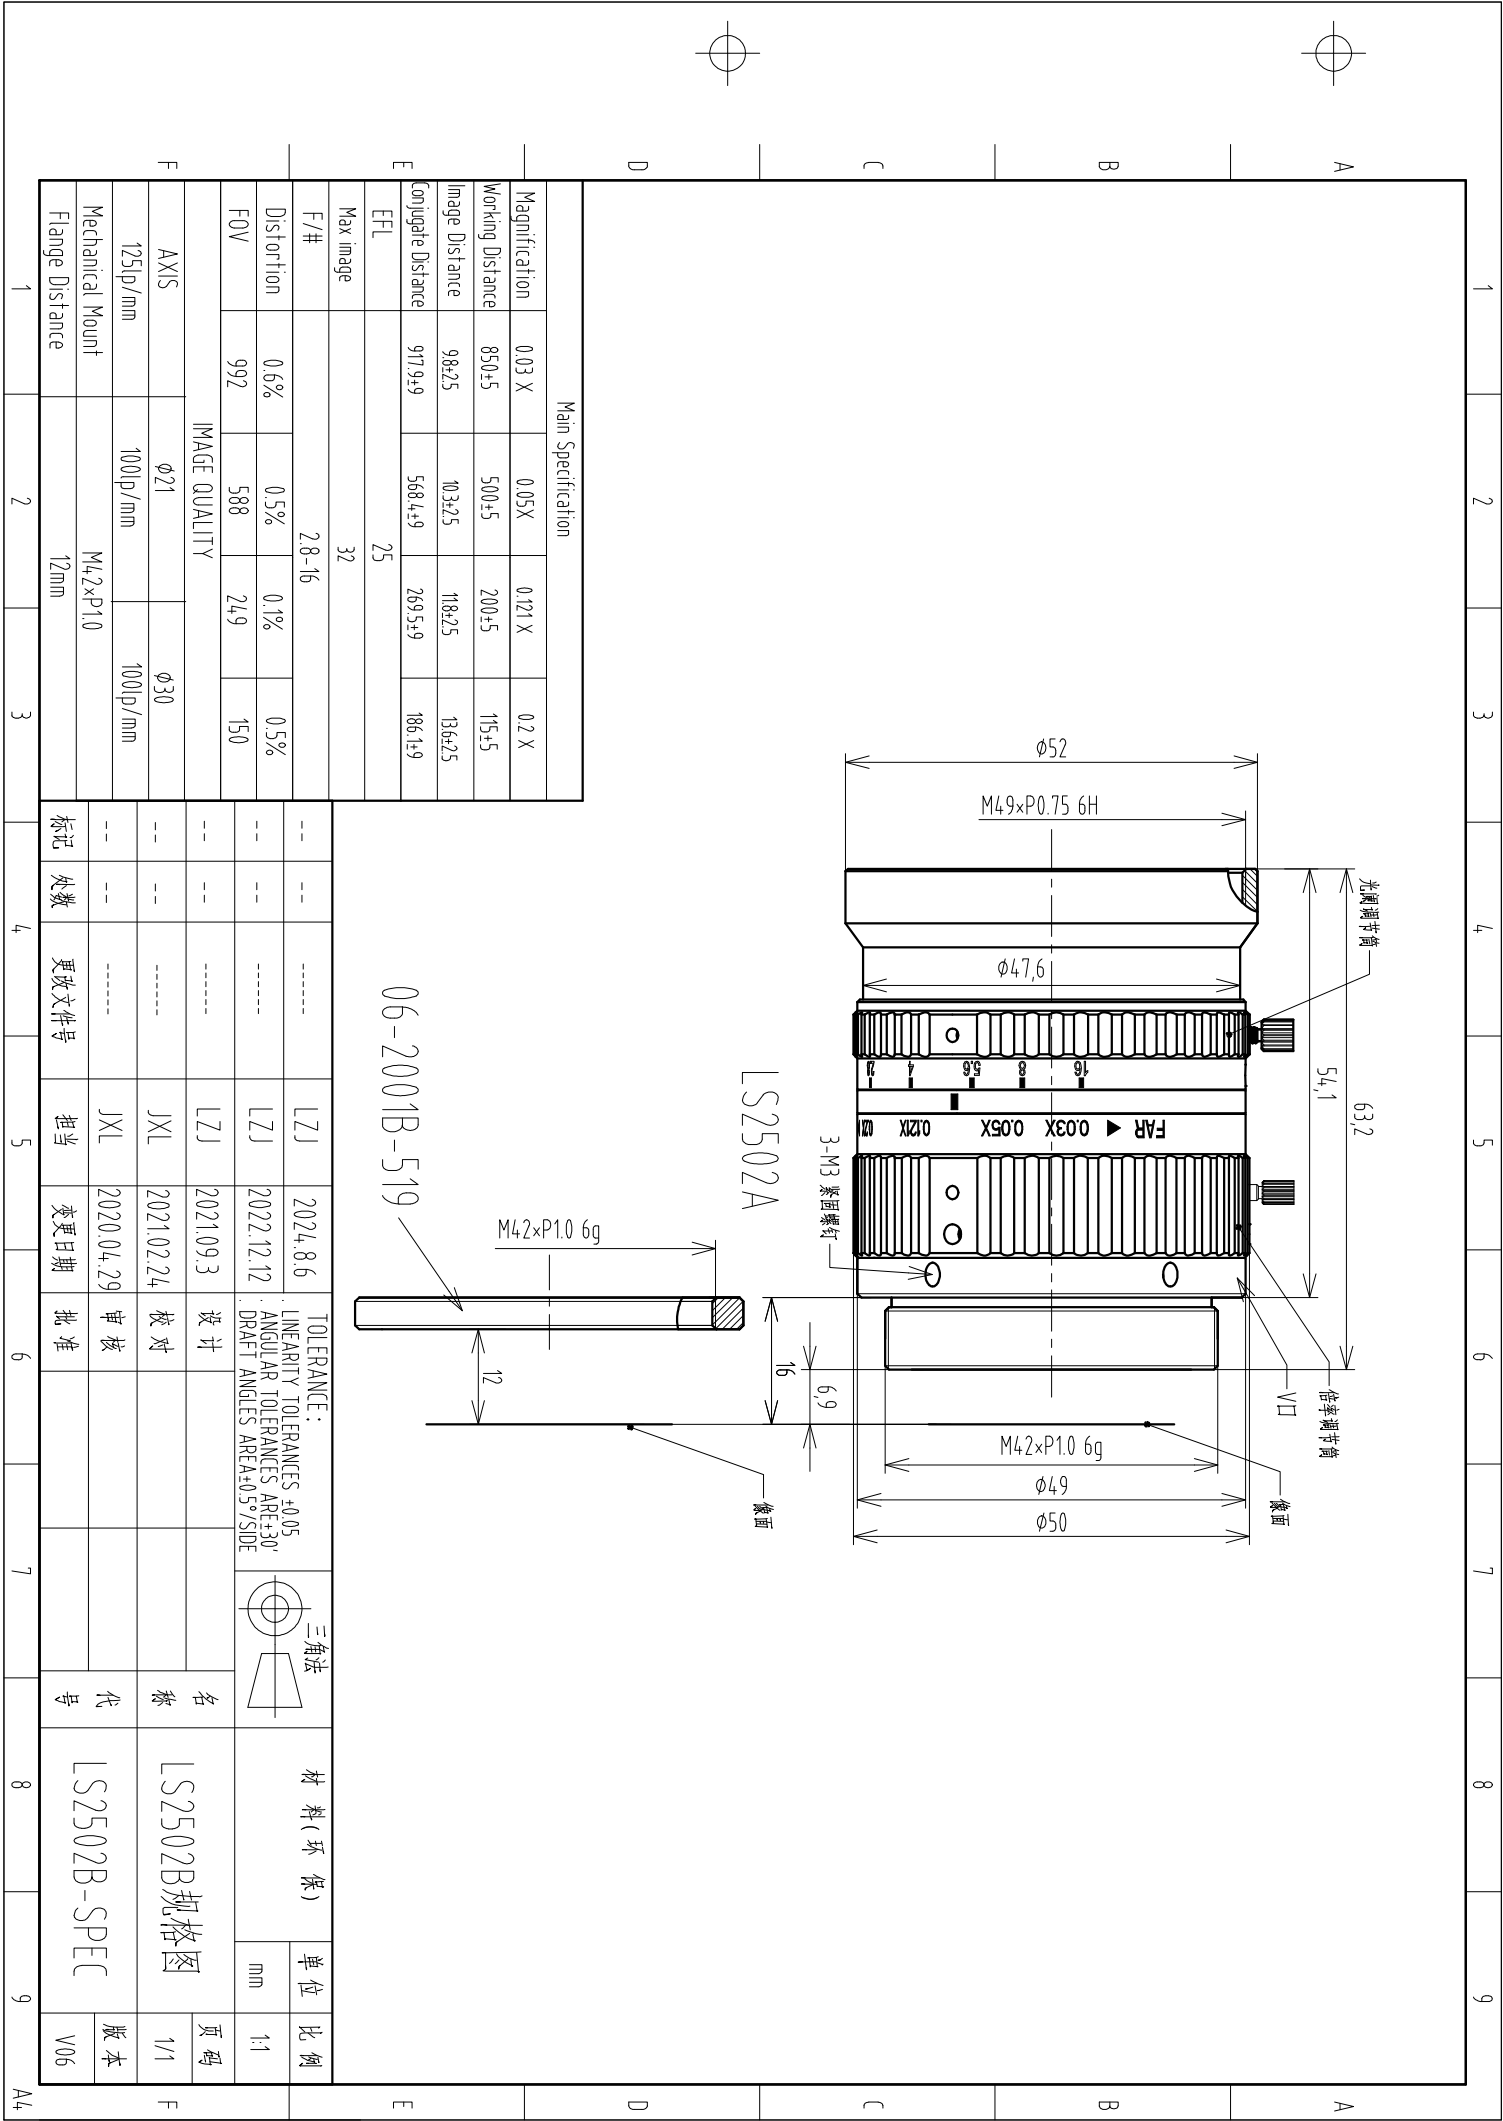

Main Specification				
Magnification	0.03 X	0.05X	0.121 X	0.2 X
Working Distance	850±5	500±5	200±5	115±5
Image Distance	98±25	103±25	118±25	136±25
Conjugate Distance	917.9±9	568.4±9	269.5±9	186.1±9
EFL	25			
Max image	32			
F/#	2.8-16			
Distortion	0.6%	0.5%	0.1%	0.5%
FOV	992	588	249	150
IMAGE QUALITY				
AXIS	φ21		φ30	
125lp/mm	100lp/mm		100lp/mm	
Mechanical Mount	M4.2×P1.0			
Flange Distance	12mm			

--	--	-----	LZJ	2024.8.6	TOLERANCE: LINEARITY TOLERANCES +0.05 ANGULAR TOLERANCES ARE±30° DRAFT ANGLES AREA±0.5°/SIDE		三角法	材料(环保)	单位	比例
--	--	-----	LZJ	2022.12.12						
--	--	-----	LZJ	2021.09.3						
--	--	-----	LXL	2021.02.24						
--	--	-----	JXL	2020.04.29	变更日期	批准				
标记	处数	更改文件号	担当							

名称		LS2502B规格图		LS2502B-SPEC	
代	号	页	码	版	本
		1/1		V06	