
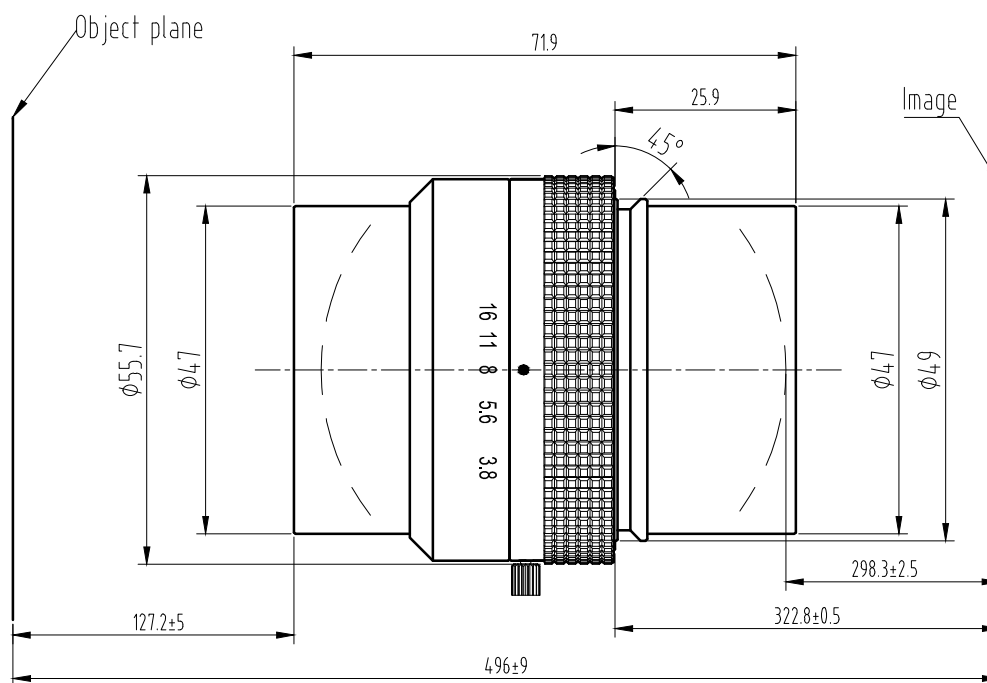
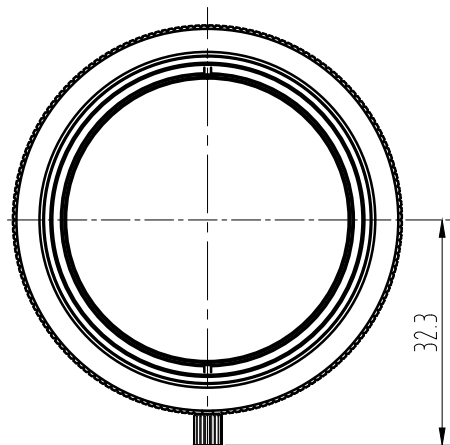




Main Specification			
Magnification	-1.75	-2	-2.25
Working Distance	135.7±5	127.2±5	121±5
Image Distance	268.4±2.5	298.3±2.5	326.4±2.5
Conjugate Distance	474.7±9	496±9	517.9±9
Flange Focal Distance	292.9±0.5	322.8±0.5	350.9±0.5
Max image	ø84		
F/#	3.8		
EFL	116		
FOV	11.3°		
ENP Diameter	30.52		
Distortion	0.0008%		
Structure	8G		
IMAGE QUALITY			
AXIS	ø46.2	ø84	
200lp/mm	160lp/mm	160lp/mm	

					TOLERANCE : LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE±30' DRAFT ANGLES AREA±0.5°/SIDE				三角法	材 料 (环 保)	单 位	比 例
											mm	1:1
					设 计	朱周德	2014-07-07	名 称	LS1620A技术规格图		页 码	
					校 对						1/1	
	1	倍率参数更改	朱周德	2014,07,07	审 核			代 号	LS1620A-SPEC		版 本	
标记	处数	更改文件号	担当	变更日期	批 准						V2	